



DECO



INDUSTRIAL



NATURE



STONE




WOOD

30 models
5 collections

Introducing the PRINT Series, manufactured using a digital sublimation printing technique patented by **Bosnor**, which allows us to obtain unlimited possibilities in colors and design. Five collections with individual personalities and unique designs.

Due to the printing technique developed by Bosnor, our PRINT shower trays offer multiple finishes perfectly anchored in the polymer matrix. The finishing lacquer protects the image keeping the colors unalterable over the years and improving the non-slip properties of our PRINT shower trays.

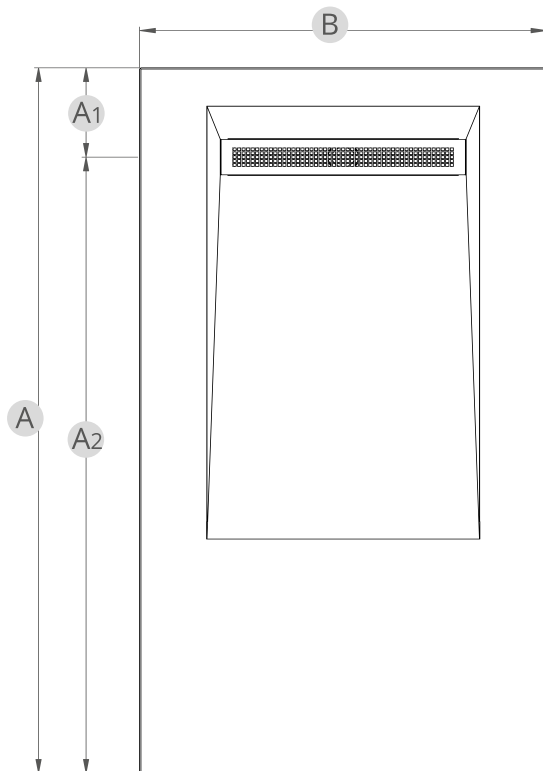

Available dimensions

A (Length): 120, 140, 160, 180 cm.

A1: 17 cm¹, 23 cm²
A2: Difference between A1 and the total length

B (Width): 70, 80, 90 cm.


¹ For shower trays of 120cm length and/or 70 cm width

² For the rest of shower trays


Our shower trays are available in 7 different lengths and 3 different widths, which can be combined in accordance with your needs




Drain

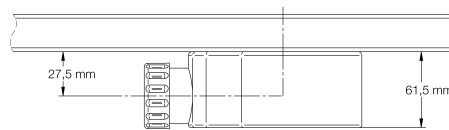

Dimensions



Drain covers

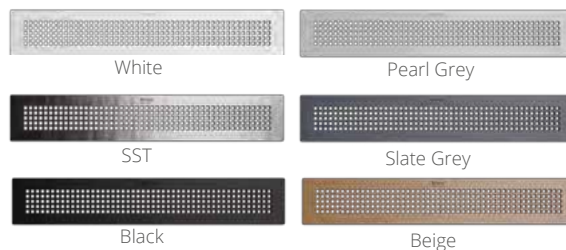

Solid Syntech® is:

- ✓ Highly resistant
- ✓ Anti-slip
- ✓ Long-lasting
- ✓ Silky
- ✓ Easy-to-cut
- ✓ Design and innovation










Solid Syntech is a high-quality technical material developed by **Bosnor**, suitable for use as a cladding or base for the manufacture of solid and compact shower trays.

Composition

This material is composed of a high-performance polyester resin and a high-finesse and high-purity non-mineral synthetic filler called ATH (aluminum trihydroxide).

The result is a completely homogeneous material, technically superior to other market options.

Technical Specifications

	Density	1,65kg/l	Standard UNE-10545
	Impact resistance	e=0,77	Standard UNE-EN 13748
	Flex resistance and tensile strength	42,5 Mpa	Standard UNE-EN 10545
	Lineal thermal expansion coefficient	Longitudinal $\alpha_1 (1/^\circ\text{C})=2,4 \times \text{E-}5$ Transversal $\alpha_2 (1/^\circ\text{C}) 3,2 \times \text{E-}5$	Standard UNE-EN 10545
	Water absorption	W=0,06	Standard UNE-EN 13748
	Resistance to chemical products	No visual change	Standard UNE-EN 10545
	Fire reaction	Bfl-s1	Standard UNE-EN 9239
	Slip resistance	20	Standard UNE-EN 13748
	Slipperiness	C2 to C3	Standard UNE ENV 12633:2003