



Secondary Colors

213 RAL
color options

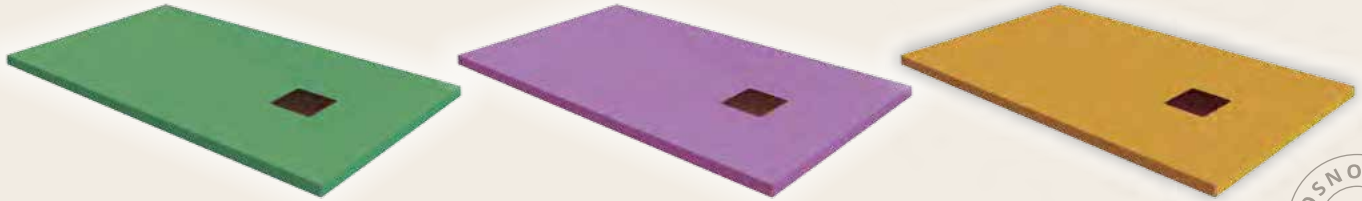

1 Lateral Step

2 Central Step

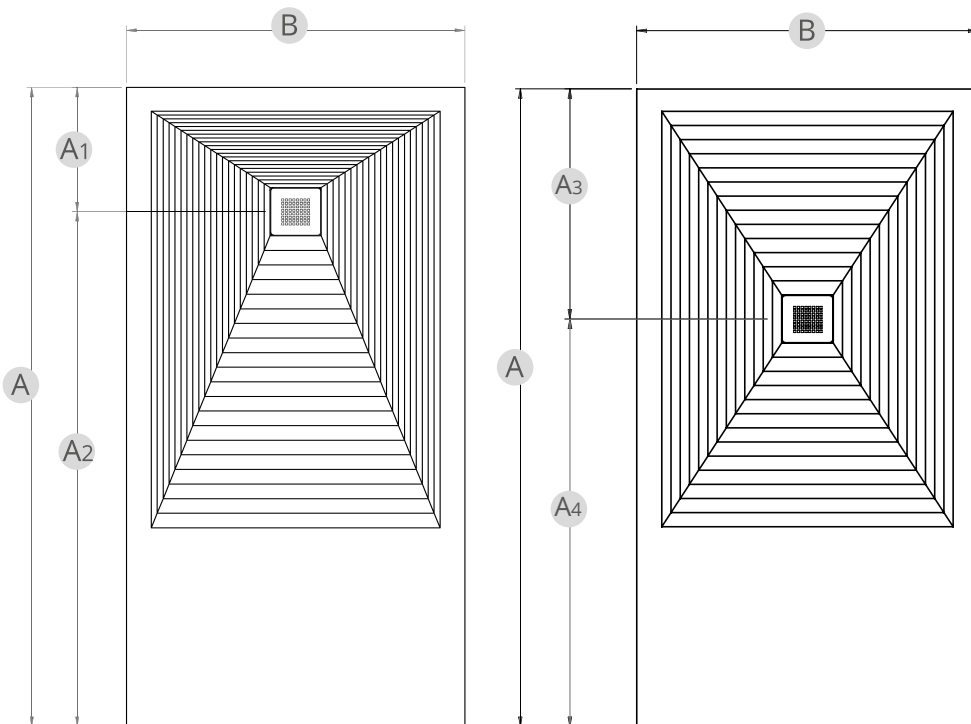

Available dimensions

1 Lateral Step

A (Length): 120, 130, 140, 150, 160, 170, 180 cm.
A1: 30 cm¹, 35 cm²
A2: Difference between A1 and the total length

¹ For shower trays of 120cm length and/or 70 cm width
² For the rest of shower trays

B (Width): 70, 80, 90 cm.


2 Central Step

A (Length): 120, 130, 140, 150, 160, 170, 180 cm.
A3: 60 cm³, 65 cm⁴
A4: Difference between A1 and the total length


³ For shower trays of 120cm length and/or 70 cm width
⁴ For the rest of shower trays

B (Width): 70, 80, 90 cm.

Drain

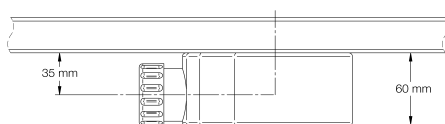

Dimensions



ANTI-SLIP
surface



Drain covers





Solid Syntech® is:

- ✓ Highly resistant
- ✓ Anti-slip
- ✓ Long-lasting
- ✓ Silky
- ✓ Easy-to-cut
- ✓ Design and innovation

Solid Syntech is a high-quality technical material developed by **Bosnor**, suitable for use as a cladding or base for the manufacture of solid and compact shower trays.

Composition

This material is composed of a high-performance polyester resin and a high-finesse and high-purity non-mineral synthetic filler called ATH (aluminum trihydroxide).

The result is a completely homogeneous material, technically superior to other market options.

Technical Specifications

	Density	1,65kg/l	Standard UNE-10545
	Impact resistance	e=0,77	Standard UNE-EN 13748
	Flex resistance and tensile strength	42,5 Mpa	Standard UNE-EN 10545
	Lineal thermal expansion coefficient	Longitudinal $\alpha_1 (1/^\circ\text{C})=2,4 \times \text{E-}5$ Transversal $\alpha_1(1/^\circ\text{C}) 3,2 \times \text{E-}5$	Standard UNE-EN 10545
	Water absorption	W=0,06	Standard UNE-EN 13748
	Resistance to chemical products	No visual change	Standard UNE-EN 10545
	Fire reaction	Bfl-s1	Standard UNE-EN 9239
	Slip resistance	20	Standard UNE-EN 13748
	Slipperiness	C2 to C3	Standard UNE ENV 12633:2003