



Primary Colors

213 RAL
color options

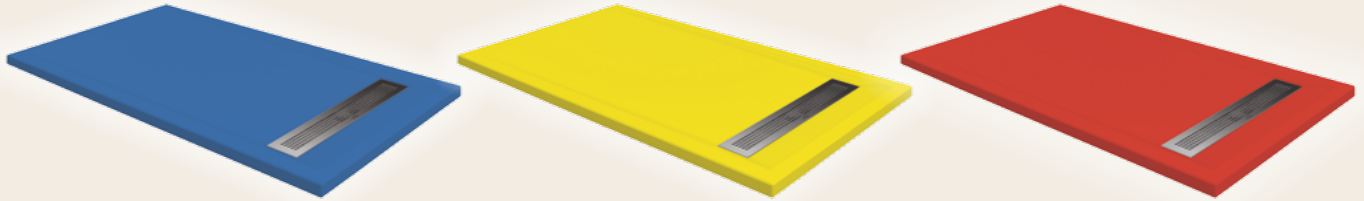

Our **Spectro** shower trays are designed to give the bathroom the colours our customers dream of. We have all the colors in the RAL chart, the equivalent of the fashionable Pantone color chart, available just for you.

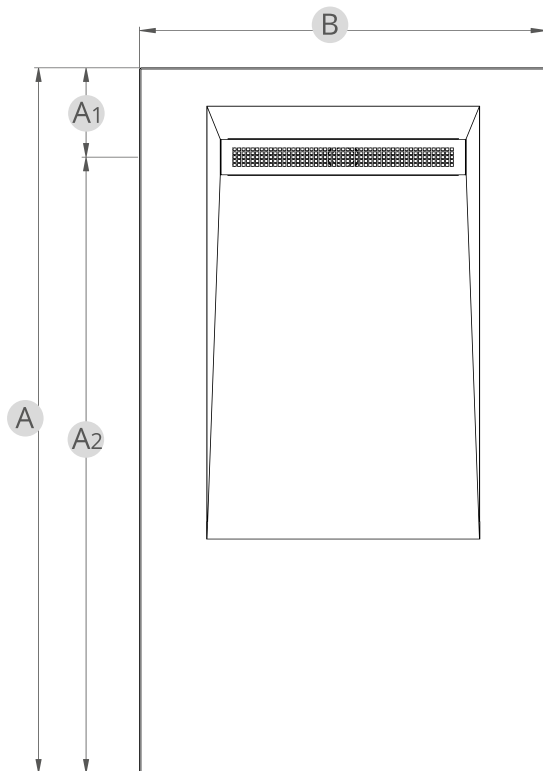

Available dimensions

A (Length): 120, 130, 140, 150, 160, 170, 180 cm.
A1: 17 cm¹, 23 cm²
A2: Difference between A1 and the total length


B (Width): 70, 80, 90 cm.

¹ For shower trays of 120cm length and/or 70 cm width
² For the rest of shower trays


Our shower trays are available in 7 different lengths and 3 different widths, which can be combined in accordance with your needs




Drain

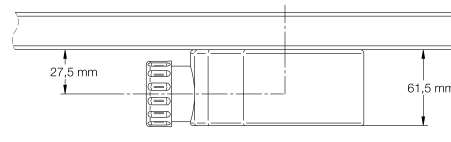

Dimensions

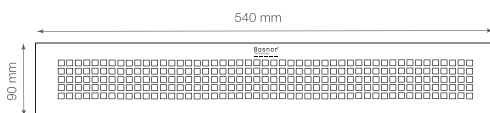

Drain covers

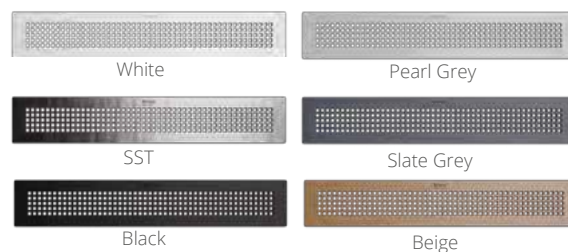

Solid Syntech®



Solid Syntech® is:

- ✓ Highly resistant
- ✓ Anti-slip
- ✓ Long-lasting
- ✓ Silky
- ✓ Easy-to-cut
- ✓ Design and innovation

Solid Syntech is a high-quality technical material developed by **Bosnor**, suitable for use as a cladding or base for the manufacture of solid and compact shower trays.

Composition

This material is composed of a high-performance polyester resin and a high-finesse and high-purity non-mineral synthetic filler called ATH (aluminum trihydroxide).

The result is a completely homogeneous material, technically superior to other market options.

Technical Specifications

| | | | |
|--|--------------------------------------|---|-----------------------------|
| | Density | 1,65kg/l | Standard UNE-10545 |
| | Impact resistance | e=0,77 | Standard UNE-EN 13748 |
| | Flex resistance and tensile strength | 42,5 Mpa | Standard UNE-EN 10545 |
| | Lineal thermal expansion coefficient | Longitudinal $\alpha_1(1/^\circ\text{C})=2,4 \times \text{E-}5$ Transversal $\alpha_1(1/^\circ\text{C}) 3,2 \times \text{E-}5$ | Standard UNE-EN 10545 |
| | Water absorption | W=0,06 | Standard UNE-EN 13748 |
| | Resistance to chemical products | No visual change | Standard UNE-EN 10545 |
| | Fire reaction | Bfl-s1 | Standard UNE-EN 9239 |
| | Slip resistance | 20 | Standard UNE-EN 13748 |
| | Slipperiness | C2 to C3 | Standard UNE ENV 12633:2003 |